




90° 右旋转

180° 右旋转

臂角90°
TS90R(右旋转)
TS90L(左旋转)

臂角135°
TS135R(右旋转)
TS135L(左旋转)

臂角180°
TS180R(右旋转)
TS180L(左旋转)

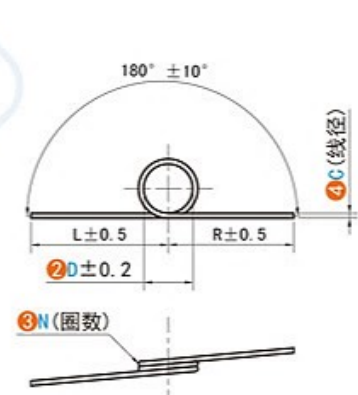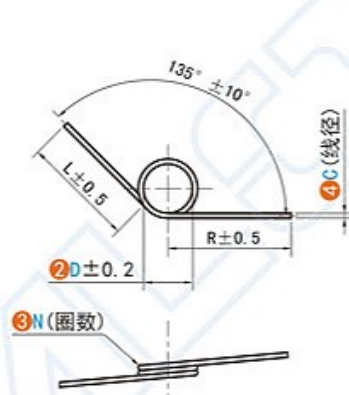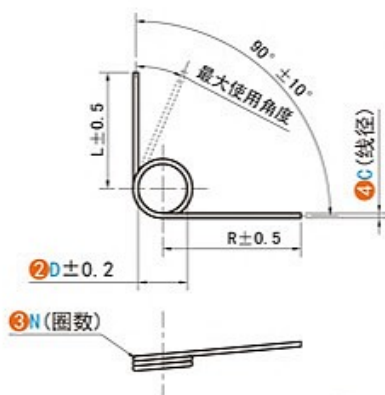

2 上图所示为右旋型, 请沿着螺旋方向使用扭簧。

材质: SUS304-WPB

1 类型码	2 D (内径)	3 N (圈数)	4 C (线径)	臂长 L · R	弹簧常数(扭矩) N · mm/deg			最大使用角度deg(度)		
					臂角 90°	臂角 135°	臂角 180°	臂角 90°	臂角 135°	臂角 180°
臂角90° TS90R(右旋型) TS90L(左旋型)	2	2	0.2	20	0.0115	0.0119	0.0124	41	40	36
			0.3	20	0.0563	0.0586	0.0611	26	25	23
		3	0.2	20	0.0088	0.009	0.0093	59	58	56
			0.3	20	0.0428	0.0441	0.0455	38	36	35
		4	0.3	20	0.0345	0.0354	0.0363	52	50	47
			0.4	20	0.1054	0.108	0.1108	38	36	34
	3	5	0.3	20	0.0289	0.0295	0.0302	61	60	58
			0.4	20	0.0882	0.09	0.092	46	45	43
		2	0.3	30	0.0387	0.0403	0.042	40	38	36
			0.4	30	0.1199	0.1248	0.1301	30	27	25
		3	0.3	30	0.0295	0.0304	0.0314	56	54	52
			0.4	30	0.0912	0.094	0.097	42	40	39
		4	0.4	30	0.0736	0.0755	0.0774	55	53	51
			0.5	30	0.1756	0.1799	0.1845	44	42	41
		5	0.4	30	0.0617	0.063	0.0643	71	68	66
			0.5	30	0.1471	0.1501	0.1533	54	53	51
臂角135° TS135R(右旋型) TS135L(左旋型)	4	2	0.4	40	0.0918	0.0955	0.0996	39	37	34
			0.5	40	0.2206	0.2296	0.2394	29	28	27
		3	0.4	40	0.07	0.0722	0.0744	56	54	52
			0.5	40	0.168	0.1732	0.1787	42	41	40
		4	0.5	40	0.1357	0.139	0.1425	57	54	52
			0.6	40	0.2763	0.2831	0.2903	48	47	45
		5	0.5	40	0.1138	0.1161	0.1185	69	67	65
			0.6	40	0.2315	0.2363	0.2413	60	59	58
	5	2	0.5	50	0.1793	0.1866	0.1944	39	36	34
			0.6	50	0.3672	0.3821	0.3983	31	30	27
		3	0.5	50	0.1368	0.1409	0.1454	55	52	51
			0.6	50	0.2797	0.2883	0.2974	47	44	42
		4	0.6	50	0.2259	0.2314	0.2373	60	58	56
			0.8	50	0.6936	0.7108	0.7289	42	41	40
臂角180° TS180R(右旋型) TS180L(左旋型)	6	2	0.6	50	0.1894	0.1933	0.1974	75	73	71
			0.8	50	0.5811	0.5931	0.6056	54	53	52
		3	0.6	60	0.3099	0.3224	0.336	37	36	34
			0.8	60	0.959	0.9981	1.0406	26	25	24
		4	0.6	60	0.2363	0.2436	0.2512	56	52	50
			0.8	60	0.7299	0.7523	0.7762	38	36	35
		5	0.8	60	0.5891	0.6037	0.619	50	48	47
			1	60	1.4045	1.4394	1.476	42	40	39
		6	0.8	60	0.4939	0.5041	0.5147	63	61	60
			1	60	1.1765	1.2008	1.2262	51	50	49
臂角180° TS180R(右旋型) TS180L(左旋型)	5	2	0.5	50	0.1793	0.1866	0.1944	39	36	34
			0.6	50	0.3672	0.3821	0.3983	31	30	27
		3	0.5	50	0.1368	0.1409	0.1454	55	52	51
			0.6	50	0.2797	0.2883	0.2974	47	44	42
		4	0.6	50	0.2259	0.2314	0.2373	60	58	56
			0.8	50	0.6936	0.7108	0.7289	42	41	40
臂角180° TS180R(右旋型) TS180L(左旋型)	6	2	0.6	50	0.1894	0.1933	0.1974	75	73	71
			0.8	50	0.5811	0.5931	0.6056	54	53	52
		3	0.6	60	0.3099	0.3224	0.336	37	36	34
			0.8	60	0.959	0.9981	1.0406	26	25	24
		4	0.6	60	0.2363	0.2436	0.2512	56	52	50
			0.8	60	0.7299	0.7523	0.7762	38	36	35
臂角180° TS180R(右旋型) TS180L(左旋型)	7	2	0.8	60	0.5891	0.6037	0.619	50	48	47
			1	60	1.4045	1.4394	1.476	42	40	39
		3	0.8	60	0.4939	0.5041	0.5147	63	61	60
			1	60	1.1765	1.2008	1.2262	51	50	49
		4	0.8	60	0.4939	0.5041	0.5147	63	61	60
			1	60	1.1765	1.2008	1.2262	51	50	49

3 弹簧常数是
指将臂长切成
L/2、R/2时的参
考值。



订购范例
Order

1 类型码	-	2 D	-	3 N	-	4 C
TS90R	-	D2	-	N2	-	C0.2

2 3 4 步请在数字前加字母, 比如D2。