




材质: SUS304-WPB

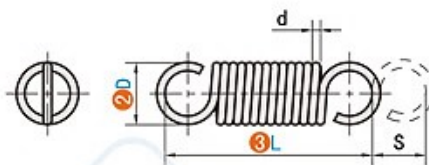

①类型码	②D	③L	线径d mm	动态负载时		初始 张力 N	弹簧 常数 N/mm
				最大位移量 Smax.	最大负载 N		
AUM	2	10	0.3	3.8	2.83	0.69	0.563
		15		6.7	2.85		0.323
		20		9.6	3.12		0.253
		25		12.6	3.22		0.201
	3	10	0.4	3.5	3.75	0.88	0.821
		15		6	3.66		0.464
		20		9	3.67		0.310
		25		12	3.69		0.234
		30		15.6	3.8		0.187
	4	15	0.5	6.5	5.94	1.18	0.733
		20		10.2	5.57		0.430
		25		13.9	5.74		0.328
		30		17.5	6.15		0.284
	5	35	0.6	20.3	5.22	1.57	0.199
		40		24	5.21		0.168
		15	0.6	5.6	7.53	1.57	1.065
		20		8.9	7.12		0.624
		25		13.7	7.54		0.436
		30		17.3	7.38		0.336
	6	35	0.8	23.7	8.25	3.53	0.282
		40		24.5	8.11		0.267
		45		28.4	7.99		0.226
		50		32.2	7.33		0.179
	8	20	1	6.7	16.66	4.9	1.959
		25		9.3	15.99		1.340
		30		12.7	15.98		0.980
		35		15.6	15.67		0.778
	10	40	1.2	18.7	15.72	5.49	0.652
		45		20.6	15.13		0.563
		50		24.5	15.05		0.470
		55		28	15.79		0.438
	12	60	1.6	29.7	15.08	14.71	0.389
		70		9.1	23.36		2.029
		75		12.5	23.3		1.472
		80		15.4	21.73		1.093
		40	1.6	19.2	22.16	14.71	0.899
		45		22.2	22.57		0.796
		50		25	20.63		0.629
		55		28.6	21.69		0.587
		60	1.2	33.3	22.12	5.49	0.517
		65		36.3	21.82		0.466
		70		40	22.46		0.439
		75		10.4	29.75		2.333
		80	1.2	13.7	29.08	5.49	1.722
		85		17.3	29.35		1.379
		90		20	28.21		1.136
		95		24.8	29.6		0.972
		100	1.6	28.2	29.8	14.71	0.862
		105		31.6	28.62		0.732
		110		34.2	27.82		0.653
		115		38.8	28.58		0.595
		120	1.6	43.3	29.69	14.71	0.559
		125		47.2	28.9		0.496
		130		8.5	59.57		5.278
		135		11.8	61.56		3.970
		140	1.6	14.3	59.11	14.71	3.105
		145		16.8	57.13		2.525
		150		19.3	58.87		2.288
		155		22.3	60.83		2.068
		160	1.6	24.5	59.08	14.71	1.811
		165		27.2	58.67		1.616
		170		28.8	57.07		1.471
		175		32.7	58.3		1.333
		180	1.6	36.3	58.2	14.71	1.198
		185		41	57.76		1.050
		190					
		195					

①类型码	②D	③L	线径d mm	动态负载时		初始 张力 N	弹簧 常数 N/mm
				最大位移量 Smax.	最大负载 N		
AUM	14	40	1.8	10.2	72.58	16.67	5.481
		45		13.1	72.17		4.237
		50		16.4	73.38		3.458
		55		19.7	73.66		2.893
	16	60	2.1	21.1	71.07	19.61	2.578
		65		24.6	71.85		2.243
		70		27.6	71.73		1.995
		75		31.1	71.9		1.776
	18	80	2.3	32.8	70.49	27.46	1.641
		90		37.5	80.38		1.699
		100		42.8	75.43		1.373
		125		60	68.69		0.867
	20	45	2.6	11.7	85.84	36.28	5.661
		50		15.1	89.89		4.654
		55		17.4	83.43		3.668
		60		21.3	86.17		3.125
	24	65	3.2	23.4	81.5	56.88	2.645
		70		26.8	99.61		2.985
		75		29.6	83.69		2.165
		80		32.7	84.75		1.992
		90	3.2	37.8	82.43	56.88	1.662
		100		45.3	84.07		1.423
		125		56.7	76.88		1.010
		150		71.5	78.96		0.830
		50	2.3	12.5	117.59	36.28	7.210
		55		15	117.37		5.994
		60		17.3	114.83		5.050
		65		20	115.16		4.385
		70	2.6	22.5	114.65	56.88	3.875
		75		25	114.84		3.495
		80		29	118.32		3.133
		90		33.6	113.71		2.567
		100	3.2	39.1	112.89	56.88	2.185
		125		53	106.96		1.500
		150		64.2	108.03		1.255
		175		14.7	147.41		7.560
		70	3.2	20	144.38	56.88	5.405
		80		25.2	141.49		4.175
		90		30.8	141.62		3.420
		100		36.1	143.86		2.980
		125	3.2	48.3	140.61	56.88	2.160
		150		59.5	133.56		1.635
		175		72.5	135.97		1.375
		200		14.7	213.36		10.645
		70	3.2	20.7	224.65	56.88	8.105
		80		24.9	225.95		6.790
		90		29.7	224.24		5.635
		100		41	214.12		3.835
		125	3.2	50.6	211.21	56.88	3.050
		150		61.4	210.99		2.510
		175		74.7	223.46		2.230
		200					

①初始张力・弹簧常数为参考值。



订购范例
Order

①类型码	-	②D	-	③L
AUM	-	D3	-	L10

②③步请在数字前加字母, 比如L10。