



减振式联轴器

螺钉夹紧分离型·标准型/加长型
铝合金



代码	类型	材质		附件
		主体	间隔环	
EDP64	螺钉夹紧分离型	标准型	铝合金	内六角圆柱头螺钉
EDP65		加长型	HNBR	

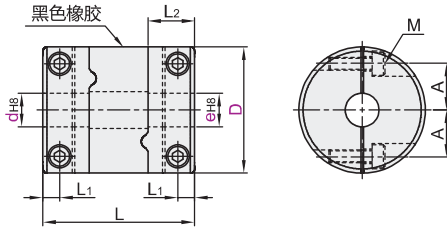

标准型

型号		d-e									
代码	D										
EDP64	15	d	3	4	4.5	5	6				
		e	5 6	4 5 6	5	5 6	6				
	19	d	4	5	6	6.35	8				
		e	5 8	5 6 7 8	6 6.35 8	8	8				
	25	d	5	6	6.35	8	10	12			
		e	6 8	6 8 10 11 12	8 10	8 10 11 12	10 12	12			
	30	d	8	10	11	12	14	15			
		e	8 10 11 12 14 15	10 11 12 14 15	12	12 14 15	14 15	15			
	34	d	8	10	11	12	14	15	16		
		e	8 10 11 12 14 15	10 11 12 14 15	11 12	12 14 15	14 15	15	16		
39	d	10	12	14	15	16	17	20			
	e	10 11 12 14 15 16	12 14 15 16 19 20	14 15 16	15 16 19	16	17	20			
44	d	12	14	15	16	17	19	20			
	e	12 14 16 19	14 15 16 19	15 16 19 20	16 19	19	20	20			
56	d	15	19	20	24	25					
	e	15 19 20 25	20 24	20 25	25	25					

加长型

型号		d-e									
代码	D										
EDP65	15	d	3	5							
		e	5	5 6							
	19	d	4	5	6	6.35	8				
		e	5	5 6 7 8	6 6.35 8	8	8				
	25	d	5	6	6.35	8	10				
		e	8	8 10	8 8 10 11 12	10 12	10 12				
	30	d	8	10	11	12					
		e	8 10 11 12 14 15	10 11 12 14 15	12	14					
	34	d	8	10	11	12	14				
		e	8 10 11 12 14	11 14	12	14	15				
	39	d	10	12	14	15					
		e	10 12 14	14	15	19					

型号		L	L ₁	L ₂	A	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m ²)	静态扭转 刚性 (N·m/rad)	容许安装偏差			重量 (g)
代码	D												径向 (mm)	角向 (°)	轴向 (mm)	
标准型 EDP64	15	23	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	2.7×10 ⁻⁷	43	0.15		±0.2	8
	19	26	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	8.4×10 ⁻⁷	88				14
	25	32	3.25	9.5	9	M2.5	1	4	8	25000	3.0×10 ⁻⁶	170				28
	30	36	4	11	11	M3	1.5	6.3	12.6	21000	6.9×10 ⁻⁶	220				45
	34	38		12	12.25								16	18000	1.3×10 ⁻⁵	390
	39	48	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.7×10 ⁻⁵	520	0.2	±0.3	98	
	44	48	4.75	15	16										14000	4.2×10 ⁻⁵
	56	60	5.5	19.5	20	M5	7	35	70	11000	1.4×10 ⁻⁴	1500				276
加长型 EDP65	15	30	2.15	6.5	5	M1.6	0.25	1.1	2.2	42000	3.3×10 ⁻⁷	32	0.15		±0.2	11
	19	34	2.65	7.7	6.5	M2	0.5	2.1	4.2	33000	9.7×10 ⁻⁷	77				19
	25	42	3.25	9.5	9	M2.5	1	4	8	25000	3.5×10 ⁻⁶	130				38
	30	42	4	11	11	M3	1.5	6.3	12.6	21000	7.3×10 ⁻⁶	200	0.2	1.5	±0.3	53
	34	44		12	12.25											16
	39	55	4.5	15.5	14.5	M4	2.5	13.5	27	16000	2.8×10 ⁻⁵	450				

① 惯性力矩和重量按最大孔计算!

标准型

型号	d-e									
代码	D									
EDP64	25	d	8	11	12					
		e	8	11	12					

EDP64—D25—d8—e10