

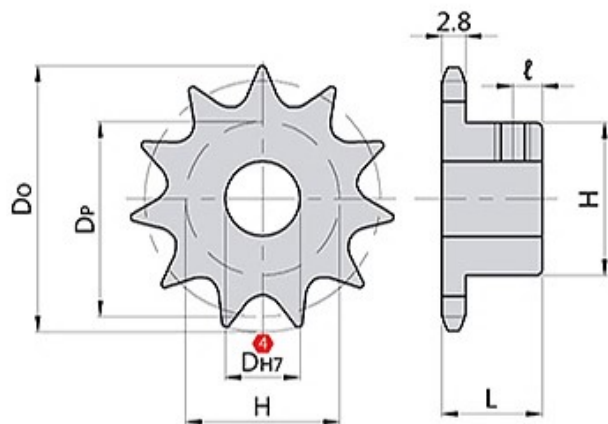




轴孔规格 **③ S**
(标准底孔)

轴孔规格 **③ N**
(新 JIS 键 + 螺纹孔)



轴孔加工尺寸表		
轴孔径 D	键槽 K1XK2	固定螺栓 M
10	3x1.4	4
10K · 12K	4x1.8	5
15 · 16	5x2.3	6
20	6x2.8	6



价格

货期

3 D



① 编码

GD25B

GDS25B

材质

S45C

SUS304

附件

轴孔 N 附固定螺丝

① 编码

GD25B

② 齿数

16

③ 轴孔选择

S

④ D

D9

型号

型号					Dp	Do	轮毂		ℓ	重量 (g)	
① 编码	② 齿数	③ 轴孔选择	④ D								
			S 孔 H8	N 孔 H7							
GD25B	16	S	9	10 10K 12	32.55	36	25	15	6	60	
	17			10 10K 12	34.46	38				70	
	18			10 10K 12	36.57	40				70	
	19			10 10K 12	38.58	42	28			90	
	20			10 10K 12	40.59	44				90	
	21			10 10K 12	42.61	46				100	
	22			12 15	44.62	48	30			110	
	23			12 15	46.63	50				120	
	24			12 15	48.65	52				140	
	25			N	12 15 16	50.66	54			35	140
	26	12 15 16	52.68		56	140					
	28	12 15 16	56.71		60	150					
	30	12 15 16	60.75		64	160					
	32	15 16 20	64.78		68	40	200				
	34	15 16 20	68.82		72		210				
	35	15 16 20	70.84		74		210				
	36	15 16 20	72.86		76		220				
	38	15 16 20	76.9		80		260				
	40	15 16 20	80.93	84		270					
GDS25B	16	S	9	10	32.55	36	21	16	6	60	
	17			10	34.56	38	23			70	
	18			10	36.57	40	25			70	
	19			10 12	38.58	42	26			90	
	20			10 12	40.59	44	28			90	
	21			12 15	42.61	46	30	18		7	100
	22			12 15	44.62	48					110
	23			12 15	46.63	50					120
	24			12 15	48.65	52					140
	25			12 15	50.66	54					140
	26	12 15	52.68	56	140						
	28	12 15	56.71	60	150						
	30	12 15	60.75	64	160						
	32	10	12 15	64.78	68						8